

NO-FRAME FIBERGLASS EDGE COATING

NO-FRAME Edge Coating is a water based penetrating coating which is applied to the perimeter edges of fiberglass acoustic panels to allow a "frameless" or "NO-FRAME" installation. NO-FRAME Edge Coating can be brushed, rolled, or sprayed onto fiberglass panels to create a stiffened edge which allows fabric to be wrapped directly around the panel without a frame.



Shake can or pail prior to opening. Use pliers to remove safety ring.



Stack fiberglass panels on covered table (plastic/paper). A spacer can be used to separate panels to avoid sticking.



Brush or roll Edge Coating liberally on all edges of the panels.



Apply a second coating on all corners.



Allow 48 hours to completely dry and harden. Coating will turn clear once fully dry. Wash tools with soap and warm water.



CONTAINER SIZES AVAILABLE

- 1 Quart Can
- 1 Gallon Pail

APPROXIMATE COVERAGE


8 Panels per Quart*

*Coverage varies based on how heavy the coating is applied. Panels based on 2" thick 24"x48"

Physical Properties for NO-FRAME Edge Coating:

Weight	9 lb. / gallon
Color	White (wet) - Clear (dry)
Avg Nonvolatile	55%
Flammability	Non-Flammable
Flame Spread	< 25
Smoke Development	< 50
Application Temperature Range	50°F to 95°F
Max VOC	0 lbs. / gallon

Caution: Use with adequate ventilation. Avoid prolonged or repeated breathing of vapor. Avoid prolonged contact with skin. Do not take internally. In case of emergency, call a physician. Keep out of reach of children.

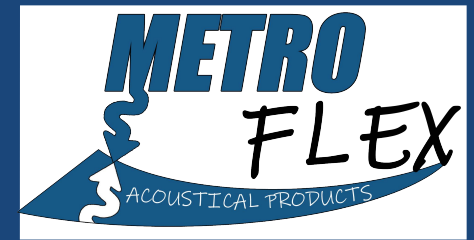

- You don't have to be a carpenter to build DIY Acoustic Panels -