




PIPE AND TANK INSULATION

Pipe and tank insulation is a faced and flexible wrap type product for applications with large curved surfaces such as pipes, tanks and large vessels. Manufactured from basalt mineral fibers that are perpendicularly oriented to the facing or jacketed outer surface, the product also provides superior compression strength. Pipe and tank wrap is furnished in roll form 36" wide and in thicknesses up to 4".

Pipe and tank wrap is available with ASJ, FSK, FSP or glass mat facings.

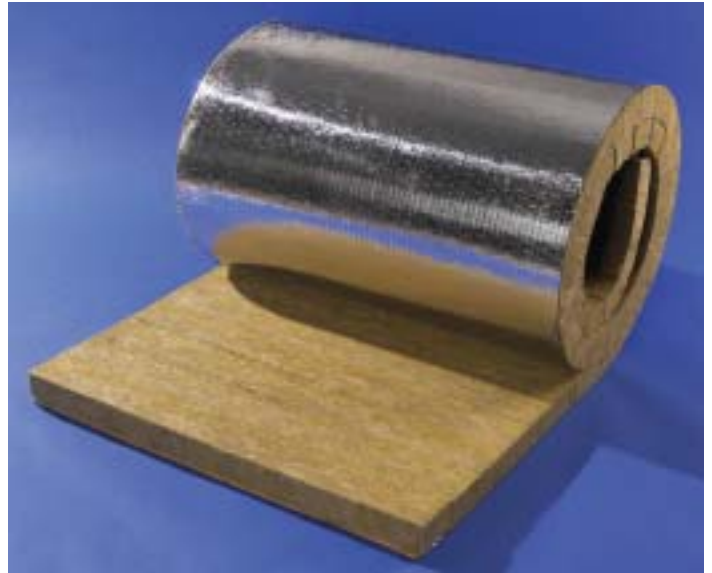

FEATURES

- High compressive strength
- High temperature range
- Easy application
- Easy clean up

BENEFITS

- Superior to other forms of insulation of equal and higher densities
- 0 to 1000°F
- One piece construction, cuts easily with a knife
- Waste is minimized

GENERAL INFORMATION

Temperature Range	0 - 1000°F
Compressive strength (10% deformation)	125 lb/sf
Flame Spread	25*
Smoke developed	50*

*(Depending on facings used)

UL rated components comply with the most stringent building codes.

Maximum use temperatures of facings and adhesives may be lower than the maximum use temperature of the insulation. Insulation thickness should be reviewed for each application.



PIPE AND TANK INSULATION

SPECIFICATION COMPLIANCE


Pipe and tank insulation mineral wool specification approvals and standard test methods are listed below. Data and independent test results are available (where applicable) upon request.

ASTM C 1393 Type I-IVA, Categories 1 and 2	Perpendicular Oriented Mineral Fiber Roll
ASTM C411	Maximum Service Temperature
ASTM C1136	Jacket Temperature Limitation
ASTM E96, Proc. A	Jacket Permeance
ASTM D781	Puncture Resistance
ASTM C165	Compressive Strength
ASTM E84	Surface Burning Characteristics
ASTM E136	Combustibility

Technical data included herein is as provided by the respective manufacturers of composite materials such as glue and facings.

THERMAL PERFORMANCE

(ASTM C177 test method)

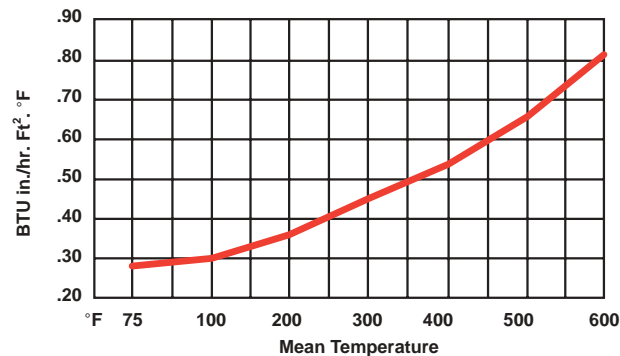

Fibrex Insulations, Inc.
PO Box 2079
561 Scott Rd.
Sarnia, Ontario
CANADA N7T 7L4



Customer Service: 1-800-265-7514
Fax: 1-800-363-4440
Phone: 519-336-7770
Technical Assistance: 1-800-585-8857
© 2003 Fibrex Insulations, Inc.